

## Pole

## 04 - Floor to Surface - 3 Sections

Series  
Pole

Materials  
Aluminum, steel, silicone

120V/240V Illumination  
Integrated LED  
Wattage: 5.4 Watts  
Lumens: 300 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Floor to Surface - 3 Sections

Metal Finishes  
Black

Dimming  
Optional

Dimensions

	A	B
Min.	85in / 216cm	96in / 245cm
Preferred	87in / 221cm	94in / 239cm
Max.	89in / 226cm	92in / 234cm


Base - Powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Wall Mount - Non powered  
L 1.8in/45cm x W 1.8in/45cm x  
H 0.3in/7cm cylindrical plate in  
matching metal finish

Weight  
41.1lb/18.6kg

Cord  
7feet /2.1m with  
Universal Wall Plug Power Supply with  
interchangeable AC Adaptors (Australian  
type, U.K. type, European type, U.S.  
type). Comes with no On/Off Switch

Certifications  
UL, cUL (120V)  
CE (240V)

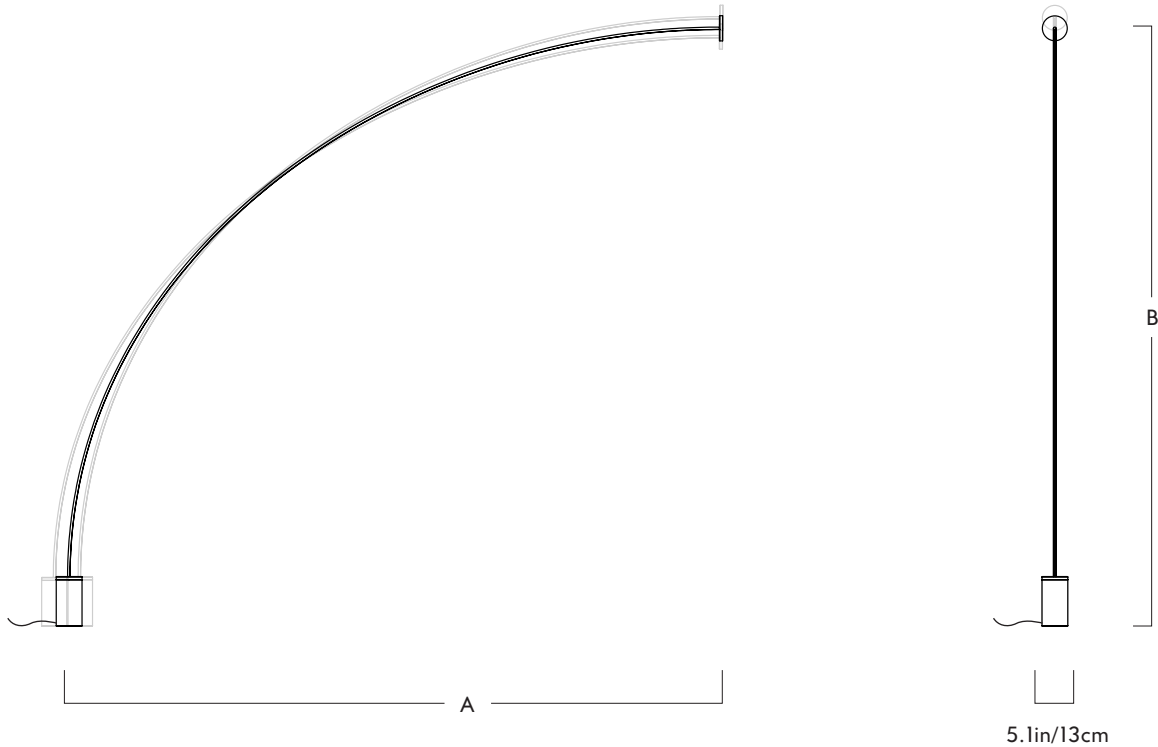

## Pole

## 04 - Floor to Surface - 4 Sections

Series  
Pole

Materials  
Aluminum, steel, silicone

120V/240V Illumination  
Integrated LED  
Wattage: 7.2 Watts  
Lumens: 400 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Floor to Surface - 4 Sections

Metal Finishes  
Black

Dimming  
Optional

Dimensions

	A	B
Min.	122in / 310cm	116in / 295cm
Preferred	124in / 315cm	114in / 290cm
Max.	126in / 320cm	112in / 285cm


Base - Powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Wall Mount - Non powered  
L 1.8in/45cm x W 1.8in/45cm x  
H 0.3in/7cm cylindrical plate in  
matching metal finish

Weight  
41.6lb/18.9kg

Cord  
7feet /2.1m with  
Universal Wall Plug Power Supply with  
interchangeable AC Adaptors (Australian  
type, U.K. type, European type, U.S.  
type). Comes with no On/Off Switch

Certifications  
UL, cUL (120V)  
CE (240V)

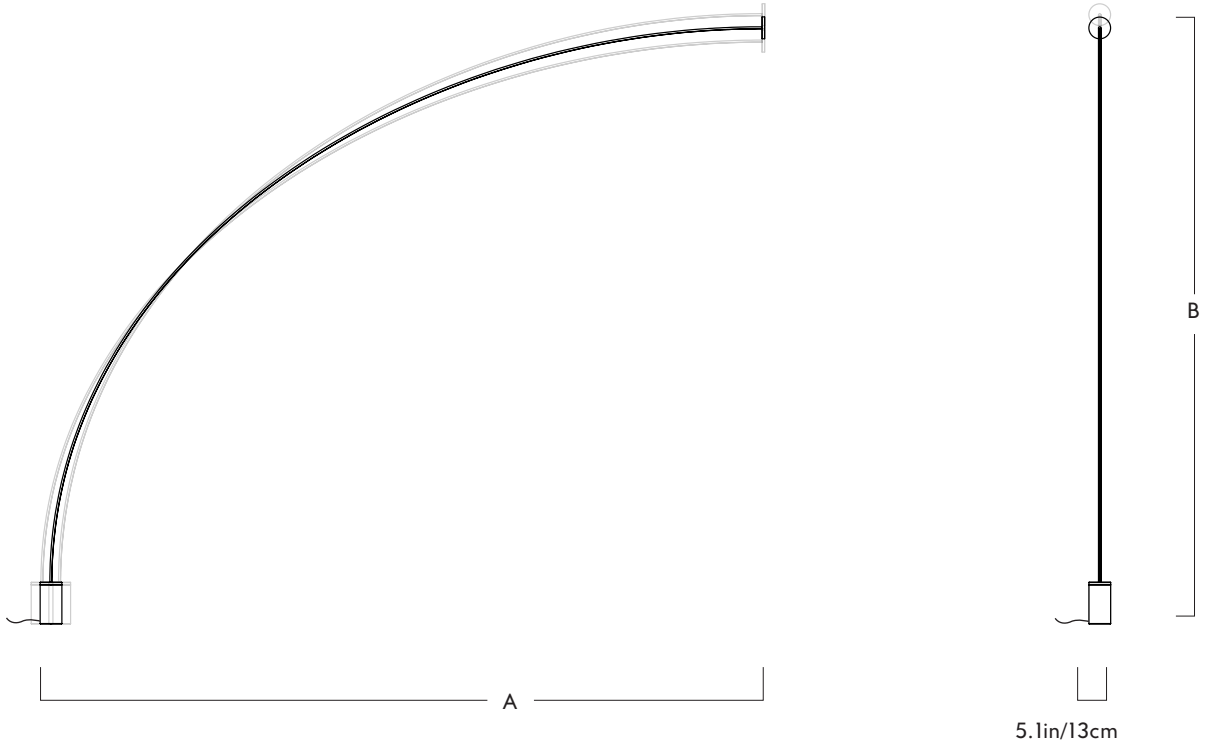

## Pole

## 04 - Floor to Surface - 5 Sections

Series  
Pole

Materials  
Aluminum, steel, silicone

120V/240V Illumination

Integrated LED  
 Wattage: 9 Watts  
 Lumens: 500 Lumens  
 Color Temperature: 2700K, 90CRI  
 LED Lifetime: 70,000 Hours

Product  
04 - Floor to Surface - 5 Sections

Metal Finishes  
Black

Dimming  
Optional

Dimensions

	A	B
Min.	158in / 401cm	138in / 351cm
Preferred	161in / 409cm	135in / 343cm
Max.	164in / 417cm	132in / 335cm


Base - Powered  
 L 5.1in/13cm x W 5.1in/13cm x  
 H 9.9in/25.1cm cylindrical bases in  
 matching metal finish (appx. 35lbs)

Wall Mount - Non powered  
 L 1.8in/45cm x W 1.8in/45cm x  
 H 0.3in/7cm cylindrical plate in  
 matching metal finish

Weight  
42.2lb/19.1kg

Cord  
 7feet /2.1m with  
 Universal Wall Plug Power Supply with  
 interchangeable AC Adaptors (Australian  
 type, U.K. type, European type, U.S.  
 type). Comes with no On/Off Switch

Certifications  
 UL, cUL (120V)  
 CE (240V)

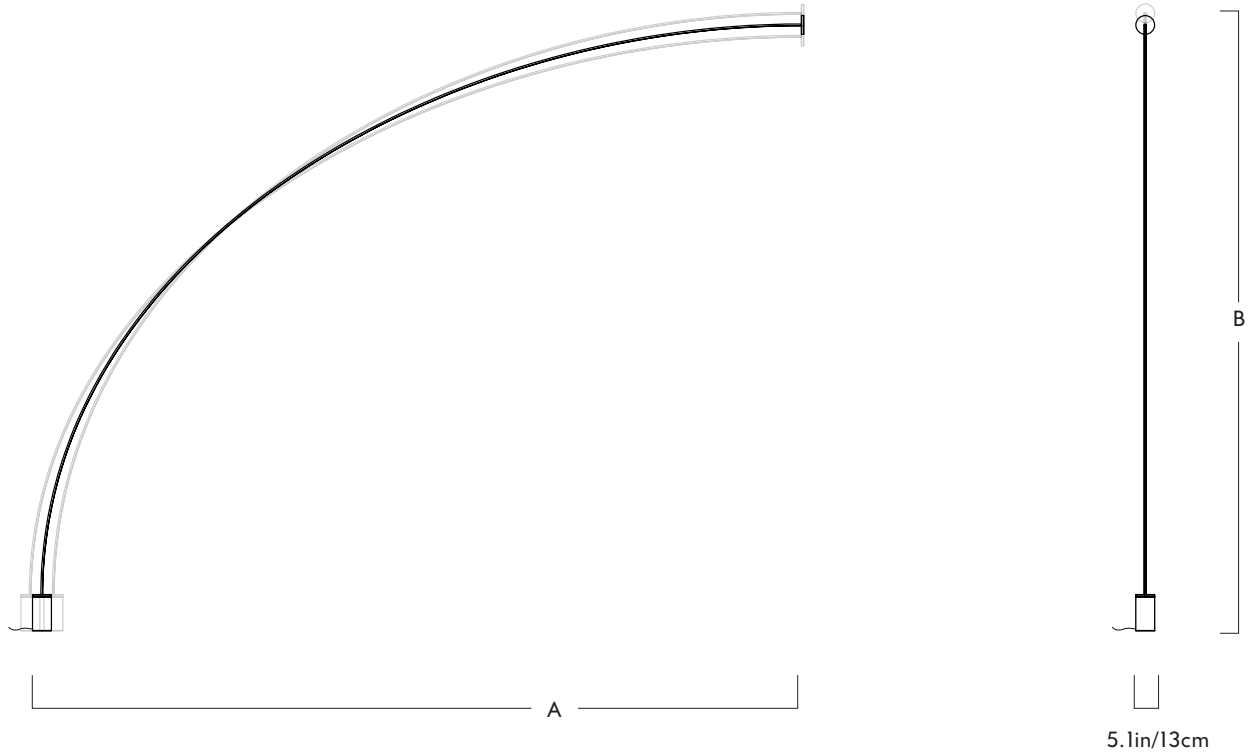

## Pole

## 04 - Floor to Surface - 6 Sections

Series  
Pole

Materials  
Aluminum, steel, silicone

120V/240V Illumination  
Integrated LED  
Wattage: 10.8 Watts  
Lumens: 600 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Floor to Surface - 6 Sections

Metal Finishes  
Black

Dimming  
Optional

	A	B
Min.	195in / 495cm	160in / 406cm
Preferred	198in / 503cm	157in / 399cm
Max.	201in / 511cm	154in / 391cm


Base - Powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Wall Mount - Non powered  
L 1.8in/45cm x W 1.8in/45cm x  
H 0.3in/7cm cylindrical plate in  
matching metal finish

Weight  
42.8lb/19.4kg

Cord  
7feet /2.1m with  
Universal Wall Plug Power Supply with  
interchangeable AC Adaptors (Australian  
type, U.K. type, European type, U.S.  
type). Comes with no On/Off Switch

Certifications  
UL, cUL (120V)  
CE (240V)

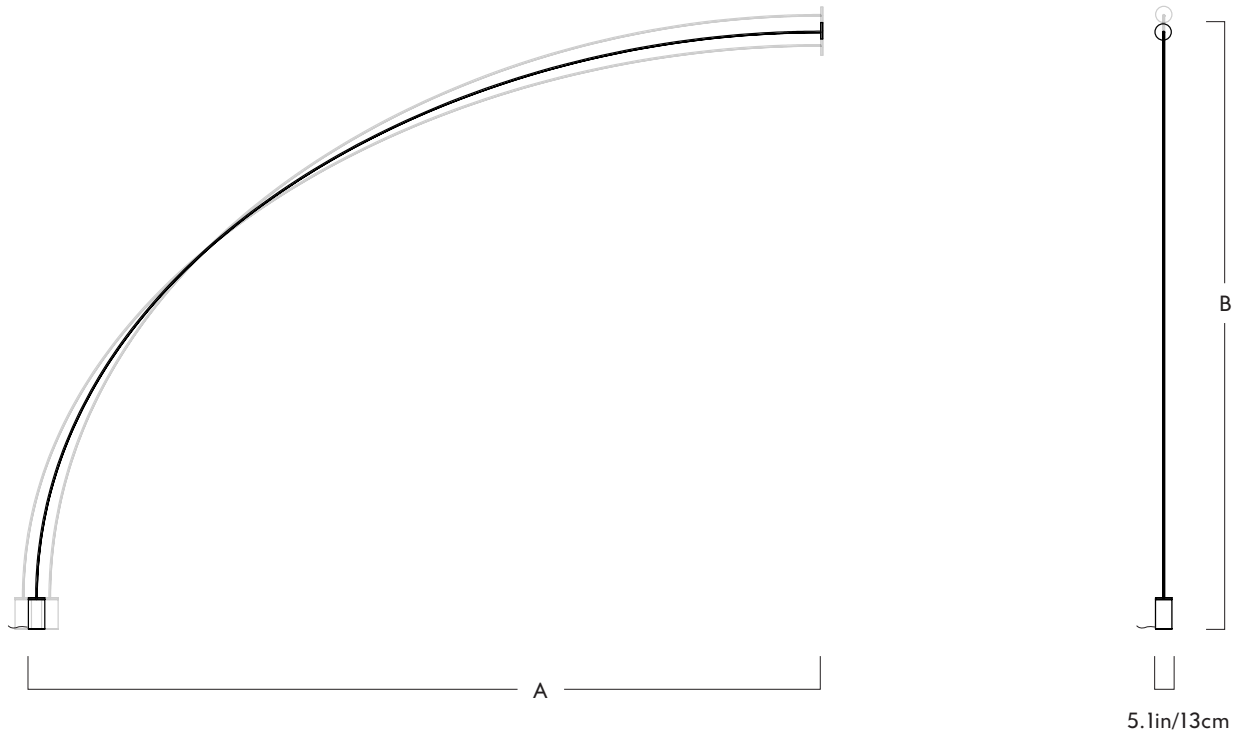

## Pole

## 04 - Floor to Surface - 7 Sections

Series  
Pole

Materials  
Aluminum, steel, silicone

120V/240V Illumination  
Integrated LED  
Wattage: 12.8 Watts  
Lumens: 700 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Floor to Surface - 7 Sections

Metal Finishes  
Black

Dimming  
Optional

	A	B
Min.	231in / 587cm	183in / 465cm
Preferred	235in / 597cm	179in / 455cm
Max.	239in / 607cm	175in / 445cm


Base - Powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Weight  
43.4lb/19.7kg

Wall Mount - Non powered  
L 1.8in/45cm x W 1.8in/45cm x  
H 0.3in/7cm cylindrical plate in  
matching metal finish

Cord  
7feet /2.1m with  
Universal Wall Plug Power Supply with  
interchangeable AC Adaptors (Australian  
type, U.K. type, European type, U.S.  
type). Comes with no On/Off Switch

Certifications  
UL, cUL (120V)  
CE (240V)

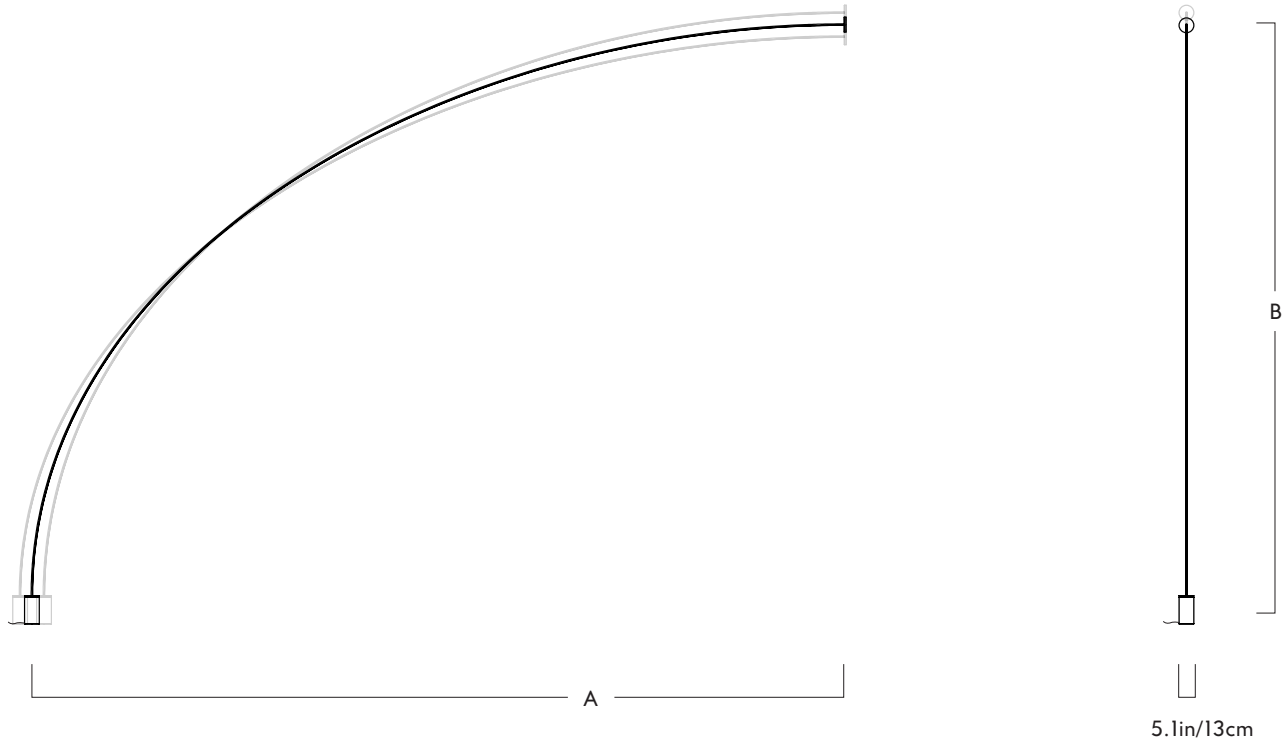

## Pole

## 04 - Floor to Surface - 8 Sections

Series  
Pole

Materials  
Aluminum, steel, silicone

120V/240V Illumination  
Integrated LED  
Wattage: 14.4 Watts  
Lumens: 800 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Floor to Surface - 8 Sections

Metal Finishes  
Black

Dimming  
Optional

Dimensions

	A	B
Min.	267in / 678cm	204in / 518cm
Preferred	271in / 688cm	200in / 508cm
Max.	275in / 699cm	196in / 498cm


Base - Powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Weight  
44lb/20kg

Wall Mount - Non powered  
L 1.8in/45cm x W 1.8in/45cm x  
H 0.3in/7cm cylindrical plate in  
matching metal finish

Cord  
7feet /2.1m with  
Universal Wall Plug Power Supply with  
interchangeable AC Adaptors (Australian  
type, U.K. type, European type, U.S.  
type). Comes with no On/Off Switch

Certifications  
UL, cUL (120V)  
CE (240V)

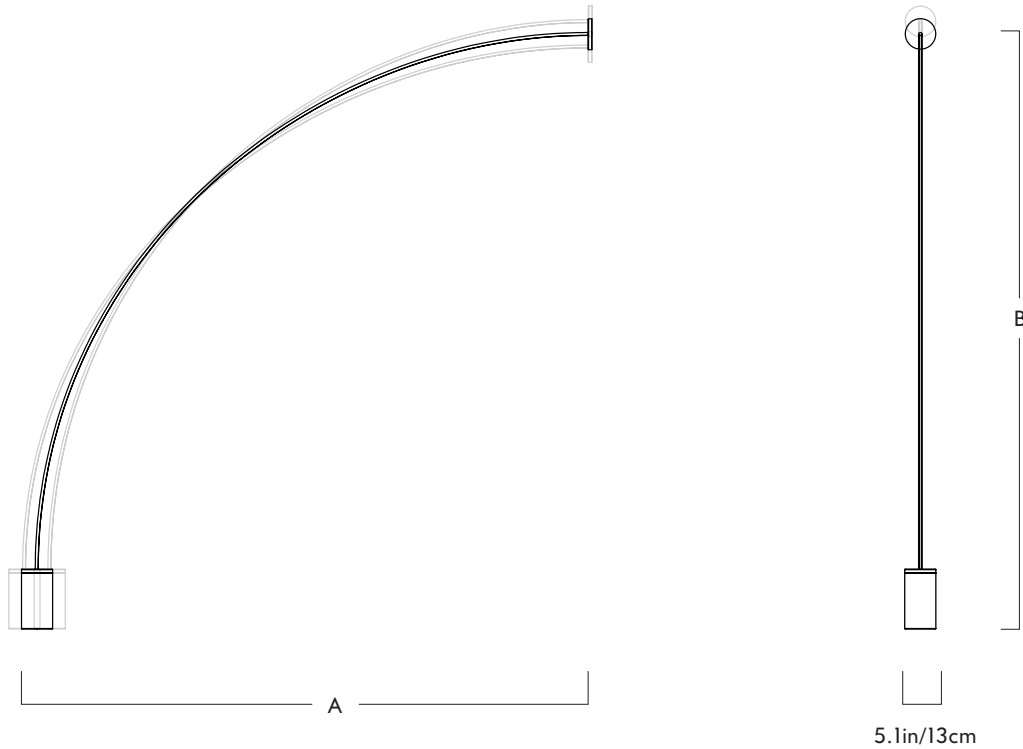

## Pole

## 04 - Surface to Floor - 3 Sections - 120V

Series  
Pole

Materials  
Aluminum, steel, silicone

120V Illumination  
Integrated LED  
Wattage: 8 Watts  
Lumens: 300 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Surface to Floor - 3 Sections - 120V

Metal Finishes  
Black

Dimming  
Triac, ELV or 0-10V

Dimensions

	A	B
Min.	85in / 216cm	96in / 245cm
Preferred	87in / 221cm	94in / 239cm
Max.	89in / 226cm	92in / 234cm

Base - Non powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)


Driver location  
Driver located in the canopy

Weight  
41.1lb/18.6kg

Wall Mount - Powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish

Fixture Mounting  
Designed to be mounted on standard 4  
in. Electrical Box.  
Two #8-32 screws included.

Certifications  
UL, cUL (120V)

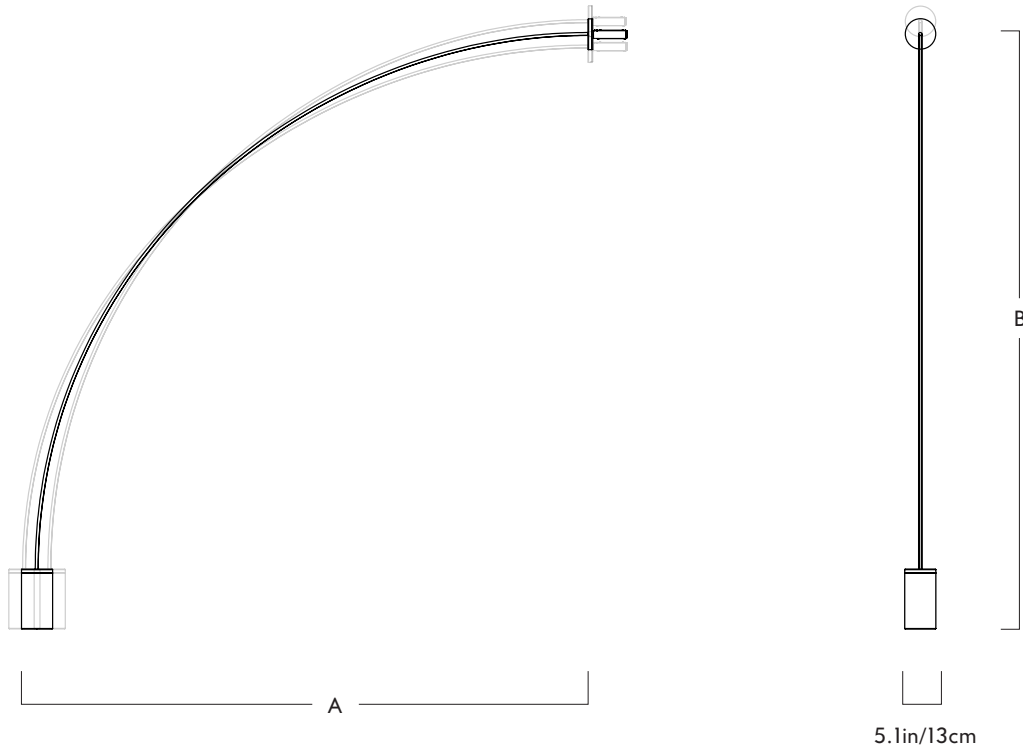

## Pole

## 04 - Surface to Floor - 3 Sections - 240V

Series  
Pole

Materials  
Aluminum, steel, silicone

240V Illumination  
Integrated LED  
Wattage: 8 Watts  
Lumens: 300 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Surface to Floor - 3 Sections - 240V

Metal Finishes  
Black

Dimming  
ELV or 0-10V

Dimensions

	A	B
Min.	85in / 216cm	96in / 245cm
Preferred	87in / 221cm	94in / 239cm
Max.	89in / 226cm	92in / 234cm

Base - Non powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Driver location  
Driver located in the Driver Box.


Weight  
41.1lb/18.6kg

Wall Mount - Powered  
L 4.1in/10.5cm x W 4.1in/10.5cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish.

Fixture Mounting  
Designed to be mounted on standard 4  
in. Electrical Box.  
Two #8-32 screws included.  
Additional mounting hardware provided  
for 240V versions.

Driver Box (240V Only)  
240V version includes box to house  
drivers. Dimensions are L 1.2in/3cm x W  
2.9in/7.5cm x H 4.5in/11.5cm

Certification  
CE (240V)

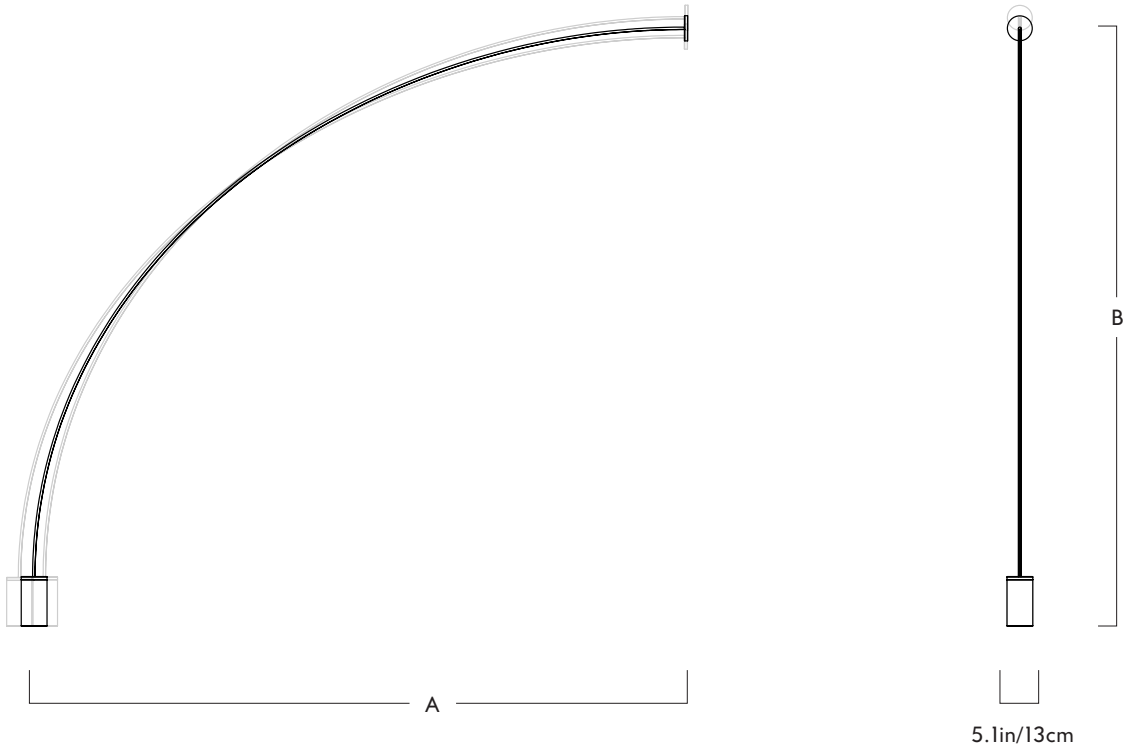

## Pole

## 04 - Surface to Floor - 4 Sections - 120V

Series  
Pole

Materials  
Aluminum, steel, silicone

120V Illumination  
Integrated LED  
Wattage: 10 Watts  
Lumens: 400 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Surface to Floor - 4 Sections - 120V

Metal Finishes  
Black

Dimensions

	A	B
Min.	122in / 310cm	116in / 295cm
Preferred	124in / 315cm	114in / 290cm
Max.	126in / 320cm	112in / 285cm

Base - Non powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Dimming  
Triac, ELV or 0-10V


Weight  
41.6lb/18.9kg

Wall Mount - Powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish

Driver location  
Driver located in the canopy

Certifications  
UL, cUL (120V)

Fixture Mounting  
Designed to be mounted on standard 4  
in. Electrical Box.  
Two #8-32 screws included.

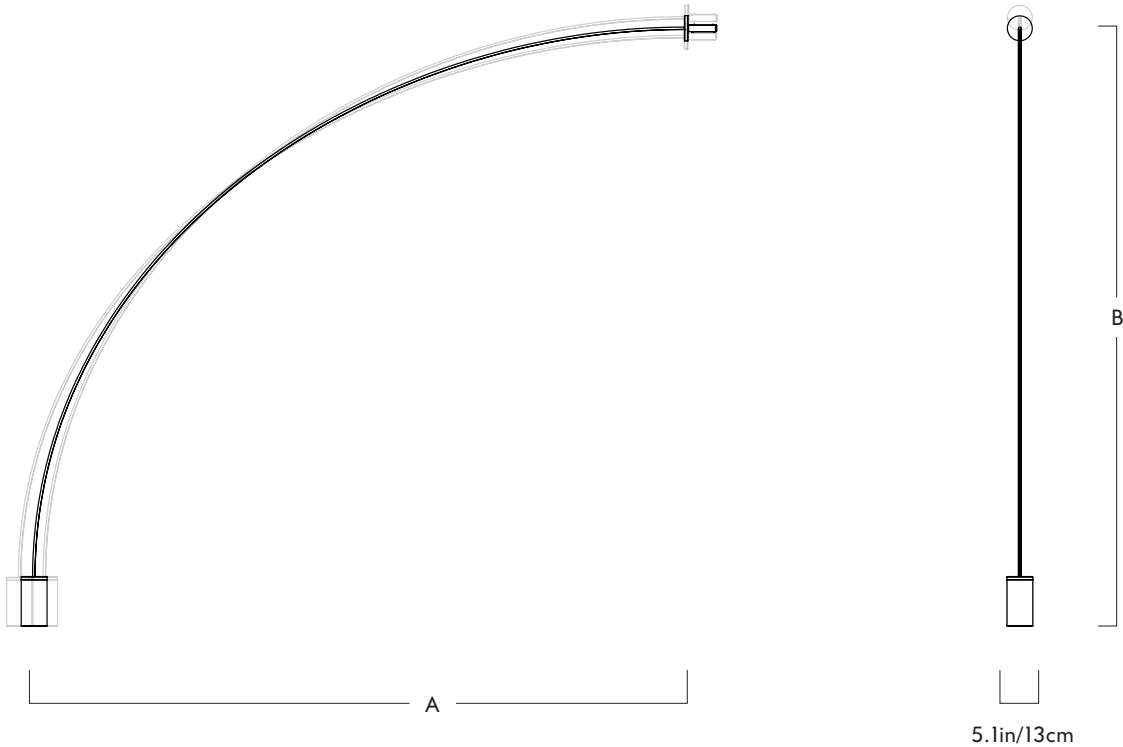

## Pole

## 04 - Surface to Floor - 4 Sections - 240V

Series  
Pole

Materials  
Aluminum, steel, silicone

240V Illumination  
Integrated LED  
Wattage: 10 Watts  
Lumens: 400 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Surface to Floor - 4 Sections - 240V

Metal Finishes  
Black

Dimming  
ELV or 0-10V

Dimensions

	A	B
Min.	122in / 310cm	116in / 295cm
Preferred	124in / 315cm	114in / 290cm
Max.	126in / 320cm	112in / 285cm

Base - Non powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Driver location  
Driver located in the Driver Box.


Weight  
41.6lb/18.9kg

Wall Mount - Powered  
L 4.1in/10.5cm x W 4.1in/10.5cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish.

Fixture Mounting  
Designed to be mounted on standard 4  
in. Electrical Box.  
Two #8-32 screws included.  
Additional mounting hardware provided  
for 240V versions.

Driver Box (240V Only)  
240V version includes box to house  
drivers. Dimensions are L 1.2in/3cm x W  
2.9in/7.5cm x H 4.5in/11.5cm

Certification  
CE (240V)

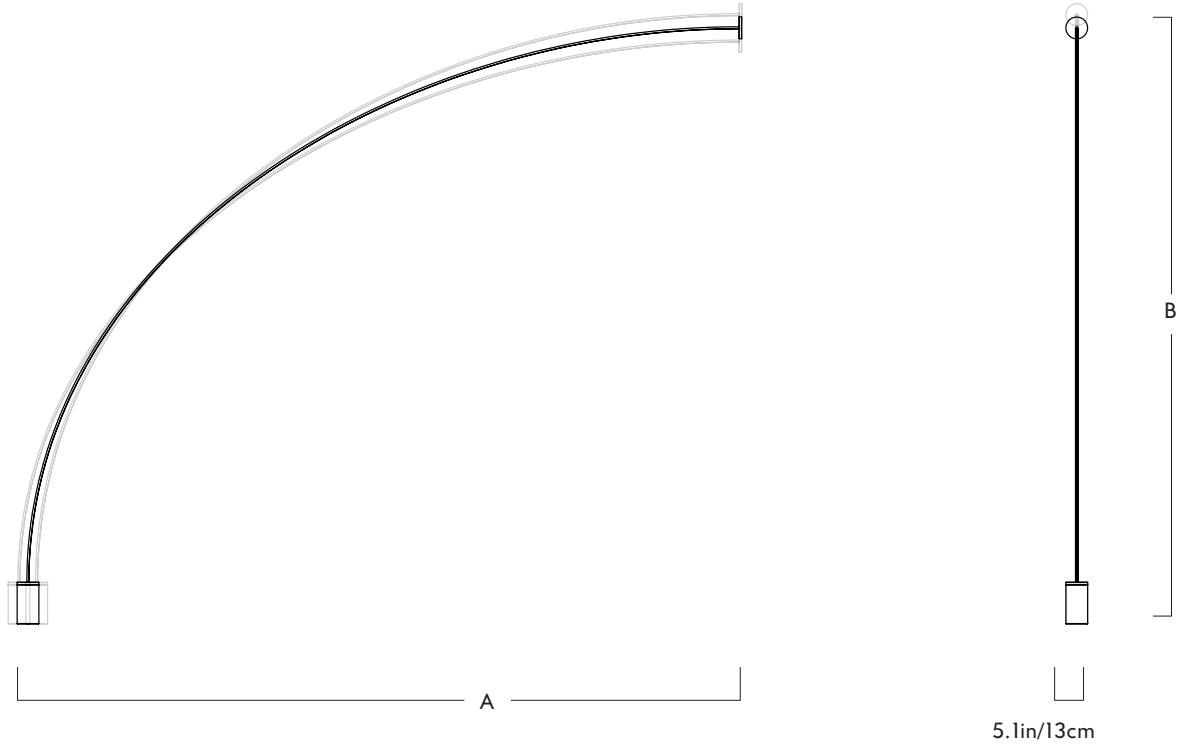

## Pole

## 04 - Surface to Floor - 5 Sections - 120V

Series  
Pole

Materials  
Aluminum, steel, silicone

120V Illumination  
Integrated LED  
Wattage: 13 Watts  
Lumens: 400 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Surface to Floor - 5 Sections - 120V

Metal Finishes  
Black

Dimensions

	A	B
Min.	158in / 401cm	138in / 351cm
Preferred	161in / 409cm	135in / 343cm
Max.	164in / 417cm	132in / 335cm

Base - Non powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Dimming  
Triac, ELV or 0-10V


Weight  
42.2lb/19.1kg

Wall Mount - Powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish

Driver location  
Driver located in the canopy

Certifications  
UL, cUL (120V)

Fixture Mounting  
Designed to be mounted on standard 4  
in. Electrical Box.  
Two #8-32 screws included.

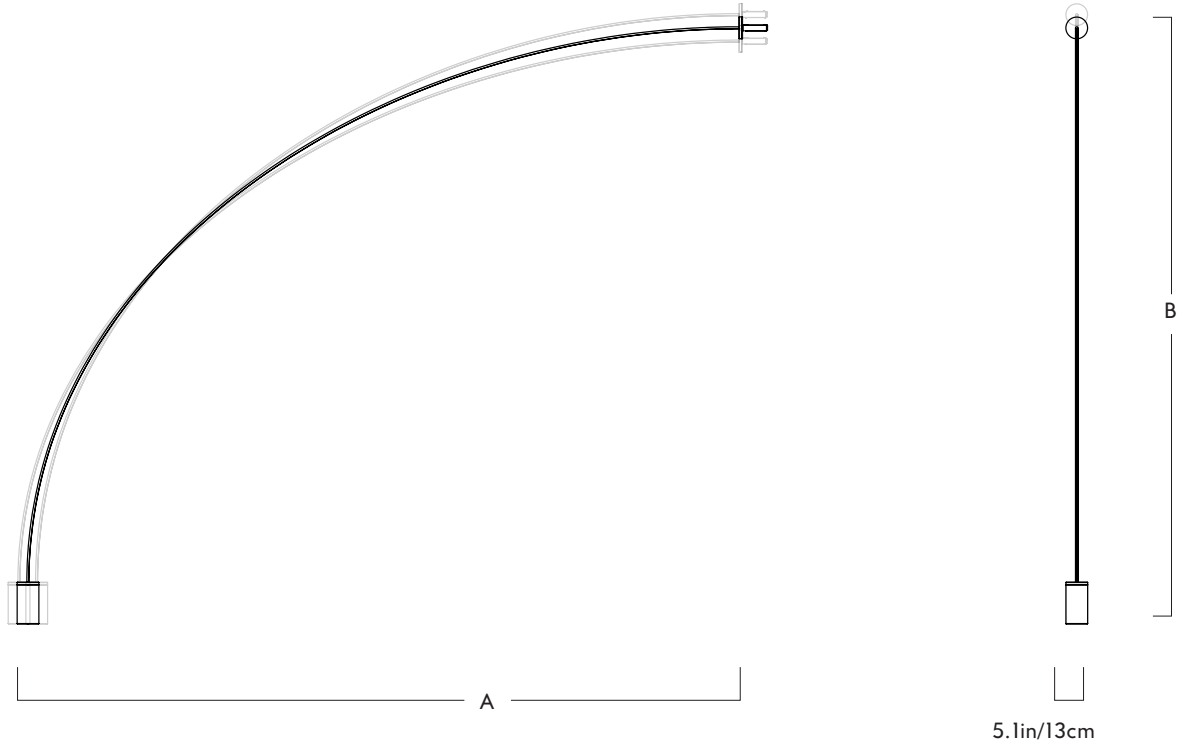

## Pole

## 04 - Surface to Floor - 5 Sections - 240V

Series  
Pole

Materials  
Aluminum, steel, silicone

240V Illumination  
Integrated LED  
Wattage: 13 Watts  
Lumens: 400 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Surface to Floor - 5 Sections - 240V

Metal Finishes  
Black

Dimming  
ELV or 0-10V

Dimensions

	A	B
Min.	158in / 401cm	138in / 351cm
Preferred	161in / 409cm	135in / 343cm
Max.	164in / 417cm	132in / 335cm

Base - Non powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Driver location  
Driver located in the Driver Box.


Weight  
42.2lb/19.1kg

Wall Mount - Powered  
L 4.1in/10.5cm x W 4.1in/10.5cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish.

Fixture Mounting  
Designed to be mounted on standard 4  
in. Electrical Box.  
Two #8-32 screws included.  
Additional mounting hardware provided  
for 240V versions.

Driver Box (240V Only)  
240V version includes box to house  
drivers. Dimensions are L 1.2in/3cm x W  
2.9in/7.5cm x H 4.5in/11.5cm

Certification  
CE (240V)

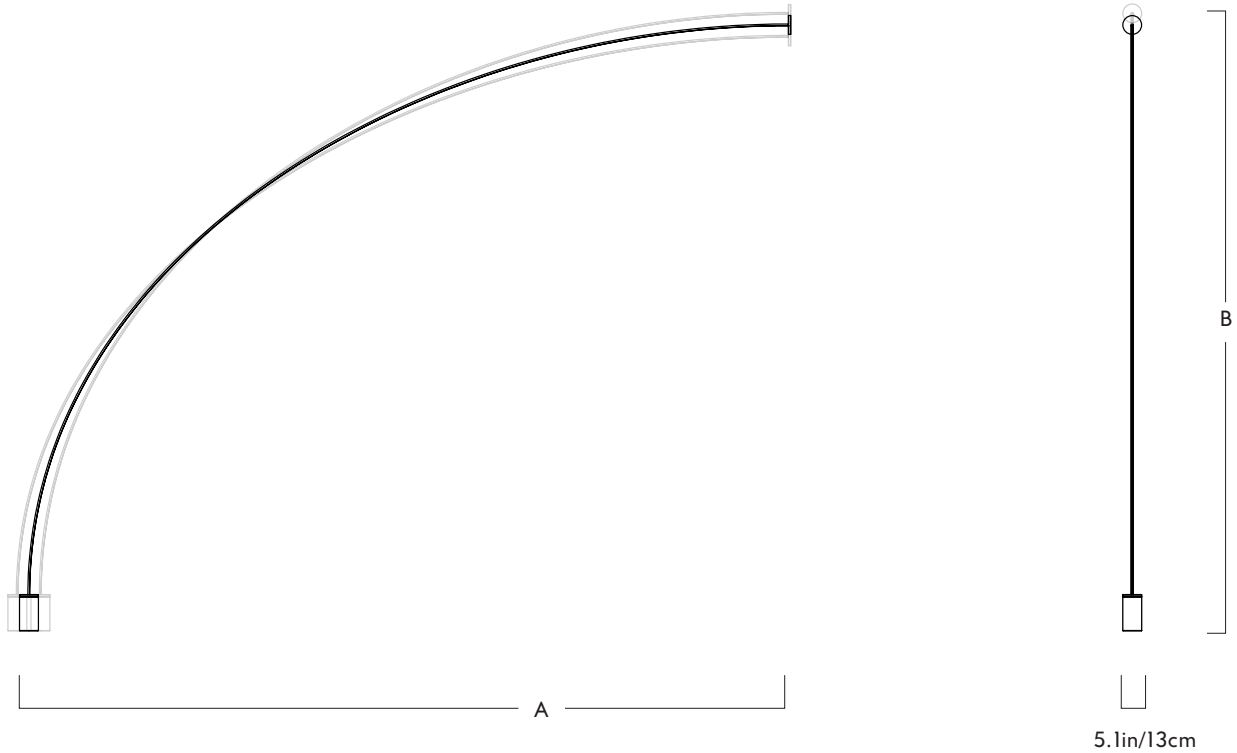

## Pole

## 04 - Surface to Floor - 6 Sections - 120V

Series  
Pole

Materials  
Aluminum, steel, silicone

120V Illumination  
Integrated LED  
Wattage: 15 Watts  
Lumens: 400 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Surface to Floor - 6 Sections - 120V

Metal Finishes  
Black

Dimensions

	A	B
Min.	195in / 495cm	160in / 406cm
Preferred	198in / 503cm	157in / 399cm
Max.	201in / 511cm	154in / 391cm

Base - Non powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Dimming  
Triac, ELV or 0-10V


Weight  
42.8lb/19.4kg

Wall Mount - Powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish

Driver location  
Driver located in the canopy

Fixture Mounting  
Designed to be mounted on standard 4  
in. Electrical Box.  
Two #8-32 screws included.

Certifications  
UL, cUL (120V)

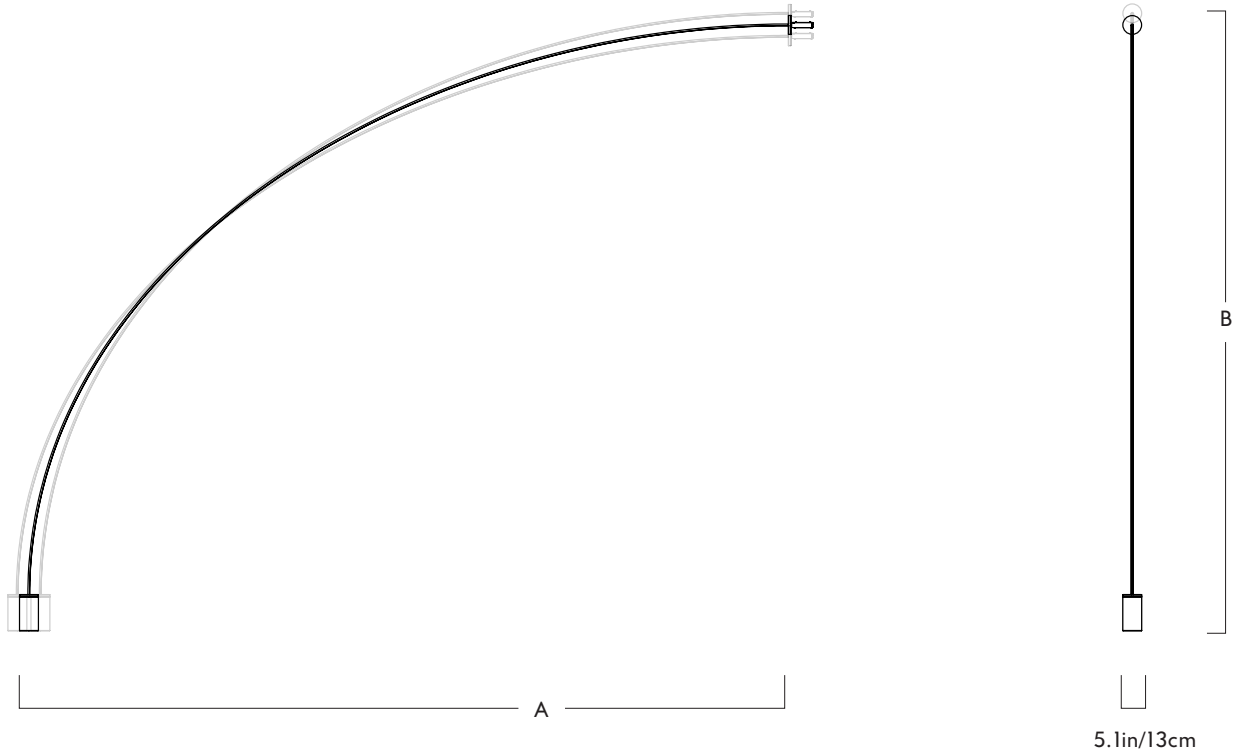

## Pole

## 04 - Surface to Floor - 6 Sections - 240V

Series  
Pole

Materials  
Aluminum, steel, silicone

240V Illumination  
Integrated LED  
Wattage: 15 Watts  
Lumens: 400 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Surface to Floor - 6 Sections - 240V

Metal Finishes  
Black

Dimming  
ELV or 0-10V

Dimensions

	A	B
Min.	195in / 495cm	160in / 406cm
Preferred	198in / 503cm	157in / 399cm
Max.	201in / 511cm	154in / 391cm

Base - Non powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Driver location  
Driver located in the Driver Box.


Weight  
42.8lb/19.4kg

Wall Mount - Powered  
L 4.1in/10.5cm x W 4.1in/10.5cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish.

Fixture Mounting  
Designed to be mounted on standard 4  
in. Electrical Box.  
Two #8-32 screws included.  
Additional mounting hardware provided  
for 240V versions.

Driver Box (240V Only)  
240V version includes box to house  
drivers. Dimensions are L 1.2in/3cm x W  
2.9in/7.5cm x H 4.5in/11.5cm

Certification  
CE (240V)

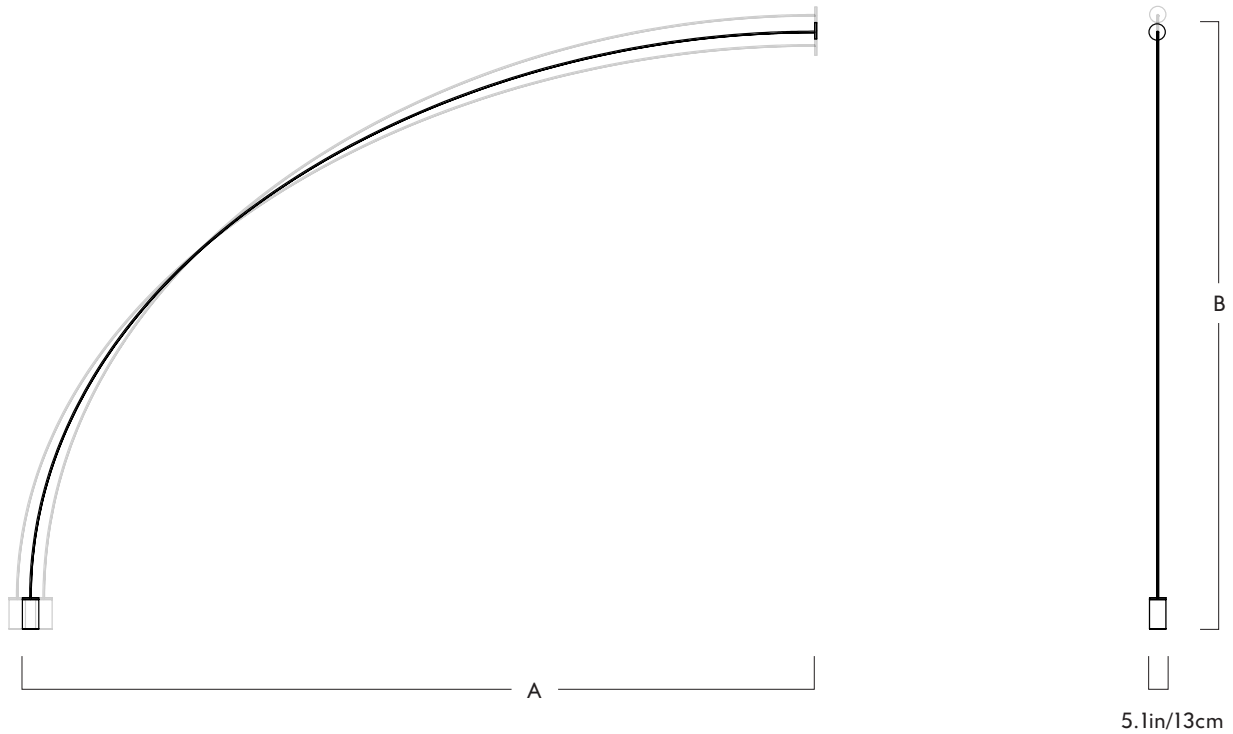

## Pole

## 04 - Surface to Floor - 7 Sections - 120V

Series  
Pole

Materials  
Aluminum, steel, silicone

120V Illumination  
Integrated LED  
Wattage: 18 Watts  
Lumens: 400 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Surface to Floor - 7 Sections - 120V

Metal Finishes  
Black

Dimensions

	A	B
Min.	231in / 587cm	183in / 465cm
Preferred	235in / 597cm	179in / 455cm
Max.	239in / 607cm	175in / 445cm

Base - Non powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Dimming  
Triac, ELV or 0-10V


Weight  
43.4lb/19.7kg

Wall Mount - Powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish

Driver location  
Driver located in the canopy

Fixture Mounting  
Designed to be mounted on standard 4  
in. Electrical Box.  
Two #8-32 screws included.

Certifications  
UL, cUL (120V)

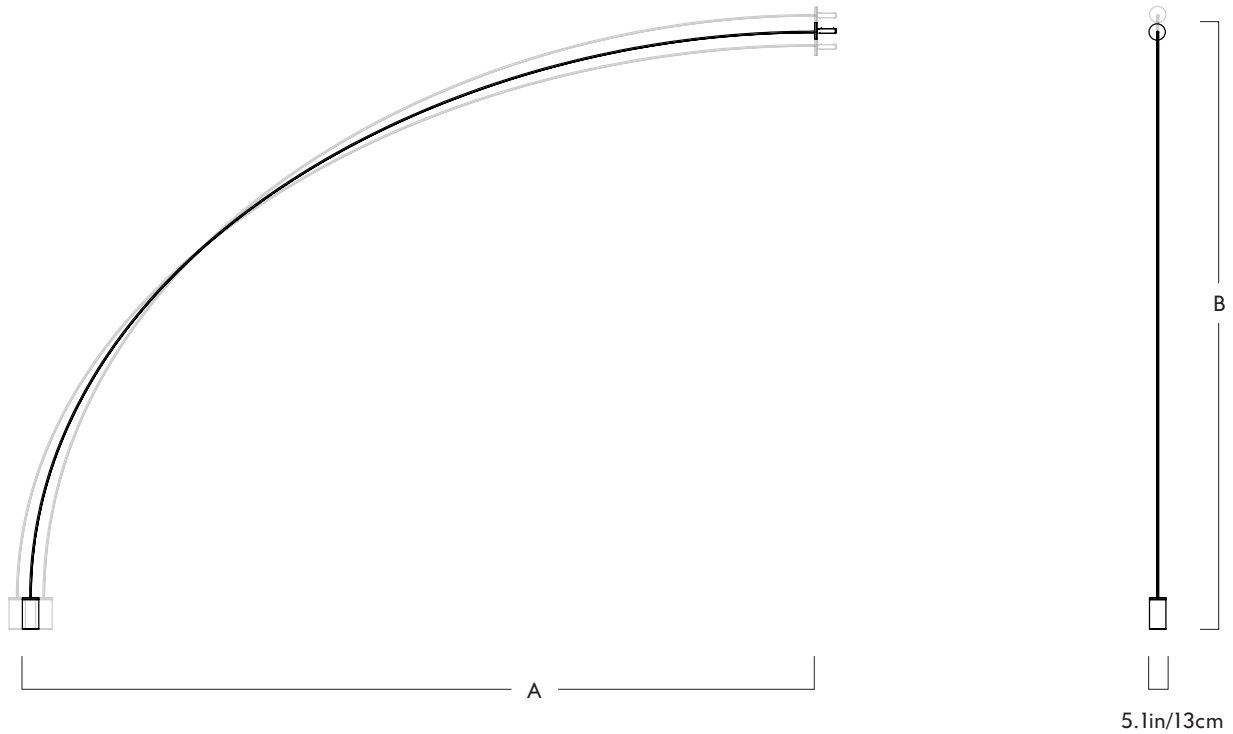

## Pole

## 04 - Surface to Floor - 7 Sections - 240V

Series  
Pole

Materials  
Aluminum, steel, silicone

240V Illumination  
Integrated LED  
Wattage: 18 Watts  
Lumens: 400 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Surface to Floor - 7 Sections - 240V

Metal Finishes  
Black

Dimming  
ELV or 0-10V

Dimensions

	A	B
Min.	231in / 587cm	183in / 465cm
Preferred	235in / 597cm	179in / 455cm
Max.	239in / 607cm	175in / 445cm

Base - Non powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Driver location  
Driver located in the Driver Box.


Weight  
43.4lb/19.7kg

Wall Mount - Powered  
L 4.1in/10.5cm x W 4.1in/10.5cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish.

Fixture Mounting  
Designed to be mounted on standard 4  
in. Electrical Box.  
Two #8-32 screws included.  
Additional mounting hardware provided  
for 240V versions.

Driver Box (240V Only)  
240V version includes box to house  
drivers. Dimensions are L 1.2in/3cm x W  
2.9in/7.5cm x H 4.5in/11.5cm

Certification  
CE (240V)

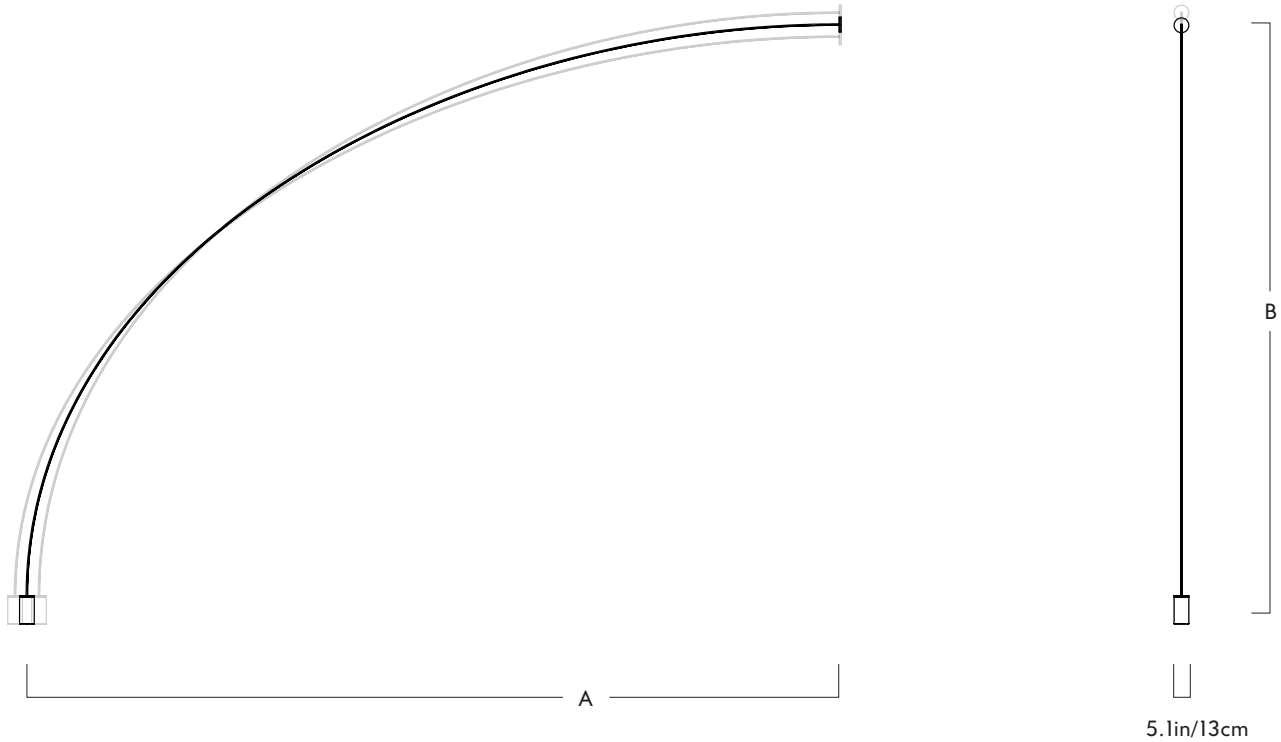

## Pole

## 04 - Surface to Floor - 8 Sections - 120V

Series  
Pole

Materials  
Aluminum, steel, silicone

120V Illumination  
Integrated LED  
Wattage: 20 Watts  
Lumens: 400 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Surface to Floor - 8 Sections - 120V

Metal Finishes  
Black

Dimensions

	A	B
Min.	267in / 678cm	204in / 518cm
Preferred	271in / 688cm	200in / 508cm
Max.	275in / 699cm	196in / 498cm

Base - Non powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Dimming  
Triac, ELV or 0-10V


Weight  
44lb/20kg

Wall Mount - Powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish

Driver location  
Driver located in the canopy

Fixture Mounting  
Designed to be mounted on standard 4  
in. Electrical Box.  
Two #8-32 screws included.

Certifications  
UL, cUL (120V)

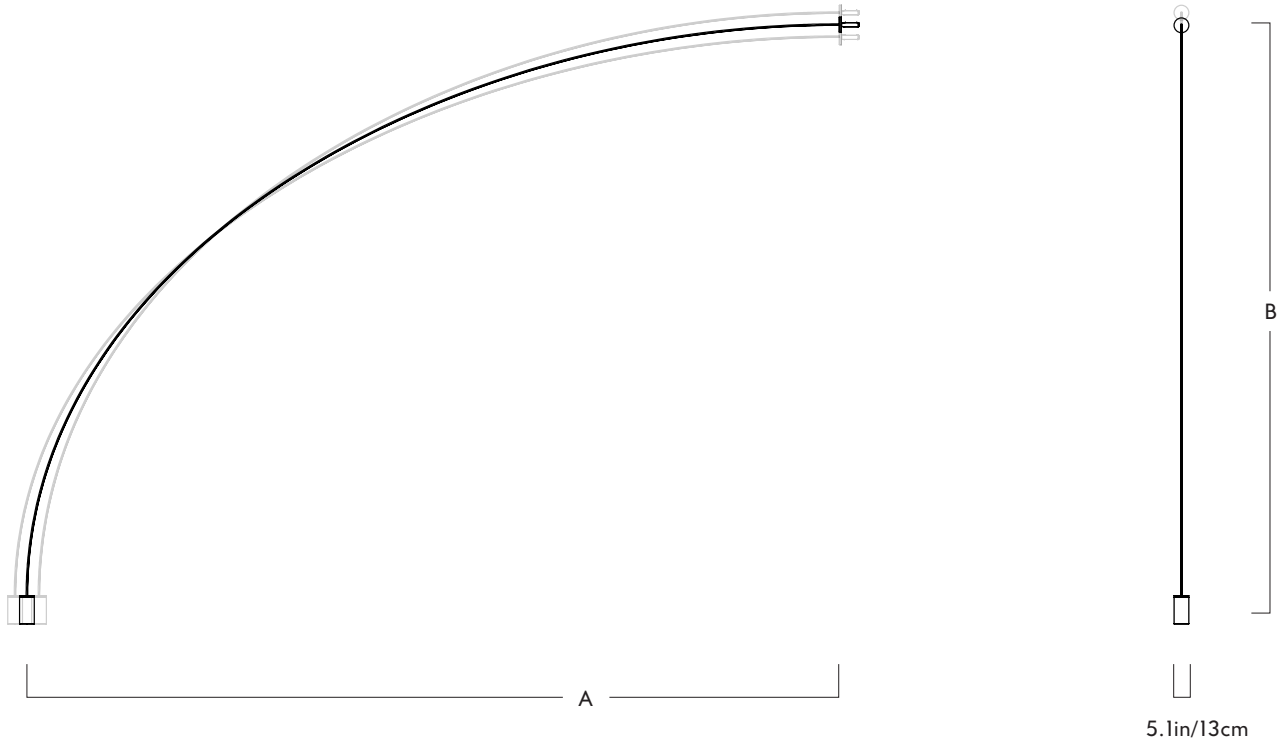

## Pole

## 04 - Surface to Floor - 8 Sections - 240V

Series  
Pole

Materials  
Aluminum, steel, silicone

240V Illumination  
Integrated LED  
Wattage: 20 Watts  
Lumens: 400 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
04 - Surface to Floor - 8 Sections - 240V

Metal Finishes  
Black

Dimming  
ELV or 0-10V

<u>Dimensions</u>		
	A	B
Min.	267in / 678cm	204in / 518cm
Preferred	271in / 688cm	200in / 508cm
Max.	275in / 699cm	196in / 498cm

Base - Non powered  
L 5.1in/13cm x W 5.1in/13cm x  
H 9.9in/25.1cm cylindrical bases in  
matching metal finish (appx. 35lbs)

Driver location  
Driver located in the Driver Box.

Weight  
44lb/20kg

Wall Mount - Powered  
L 4.1in/10.5cm x W 4.1in/10.5cm x  
H 0.4in/10cm cylindrical plate in  
matching metal finish.

Fixture Mounting  
Designed to be mounted on standard 4  
in. Electrical Box.  
Two #8-32 screws included.  
Additional mounting hardware provided  
for 240V versions.

Driver Box (240V Only)  
240V version includes box to house  
drivers. Dimensions are L 1.2in/3cm x W  
2.9in/7.5cm x H 4.5in/11.5cm

Certification  
CE (240V)