



Haul



Milan

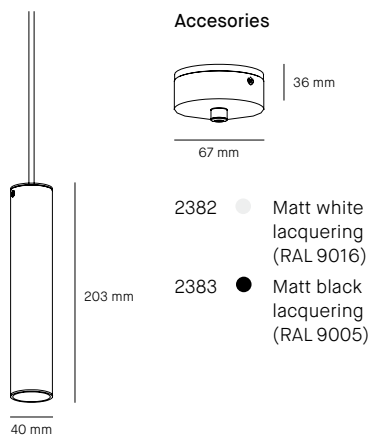


#### HAUL 40 AC S.


Ø40 mm | H. Max. 3000 mm  
 1 x DOB LED 5W   
 500 lumens | 2.700K  
 | CRI 90  
 3-step MacAdam  
 PF. 0,95  
 Dimmable  
 Class I: Basic insulation

#### Finishes

- 6795 ● Matt white lacquering (RAL 9016)
- 6796 ● Matt black lacquering (RAL 9005)

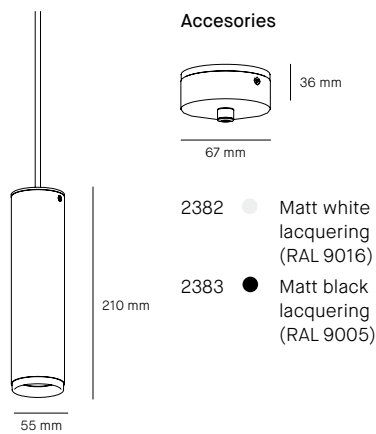


#### HAUL 55 AC S.

Ø55 mm | H. Max. 3000 mm  
 1 x DOB LED 7W   
 665 lumens | 2.700K  
 CRI 90 | 3-step MacAdam | PF. 0,95  
 Dimmable | Class I: Basic insulation

#### Finishes

- 6863 ● Matt white lacquering (RAL 9016)
- 6864 ● Matt black lacquering (RAL 9005)

1 x GU10 Bulb retrofit   
 Led 8W Ø50mm  
 Code 2123 | CRI 90  
 700 lumens | 2.700K | Dimmable  
 Class I: Basic insulation

#### Finishes

- 6843 ● Matt white lacquering (RAL 9016)
- 6844 ● Matt black lacquering (RAL 9005)

## DOWNLOADS

### Catalogue

[Haul](#)

### 3D Files

[6795/6796](#)  
[6863/6864](#)  
[6843/6844](#)

### 3D Max Files

[6795/6796](#)  
[6863/6864](#)  
[6843/6844](#)

### Assembly instructions

[6795/6796](#)  
[6863/6864](#)  
[6843/6844](#)

### Photometric curve

[6795/6796](#)  
[6863/6864](#)  
[6843/6844](#)

### Economic efficiency index

[6795/6796](#)  
[6863/6864](#)  
[6843/6844](#)


## Haul, the distance of light

### HAUL 40 AC S.


Cylinder in extruded aluminium. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005). Inner core, with heat sink function and Led housing, injected in aluminium. Injected polycarbonate reflector with high vacuum aluminium finish.

### HAUL 55 AC S.

Cylinder in extruded aluminium. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005). Inner core, with heat sink function and Led housing, injected in aluminium. Led " Holder" in polycarbonate injected. Injected polycarbonate reflector, white finishing (MOD. 6857-6858). Polycarbonate injected decorative ring. Assembly by pressure. Finishing in white, black and translucent.

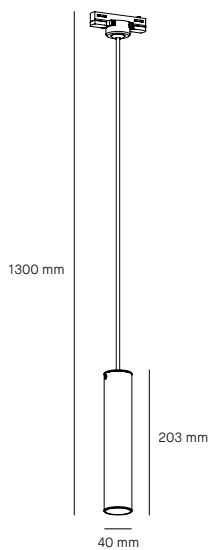

#### HAUL 40 AC ST1P.

Ø40 mm | Max.1300 mm  
 1 x DOB LED 5W   
 500 lumens | 2.700K  
 | CRI 90  
 3-step MacAdam  
 PF. 0,95  
 Dimmable  
 Class I: Basic insulation  
 1-Phase adaptor

#### Finishes

- 6809 ● Matt white lacquering (RAL 9016)
- 6810 ● Matt black lacquering (RAL 9005)

#### DOWNLOADS

##### Catalogue

[Haul](#)

##### 3D Files

[6809/6810](#)  
[6865/6866](#)  
[6845/6846](#)

##### 3D Max Files

[6809/6810](#)  
[6865/6866](#)  
[6845/6846](#)

##### Assembly instructions


[6809/6810](#)  
[6865/6866](#)  
[6845/6846](#)

##### Photometric curve


[6809/6810](#)  
[6865/6866](#)  
[6845/6846](#)

##### Economic efficiency index

[6809/6810](#)  
[6865/6866](#)  
[6845/6846](#)

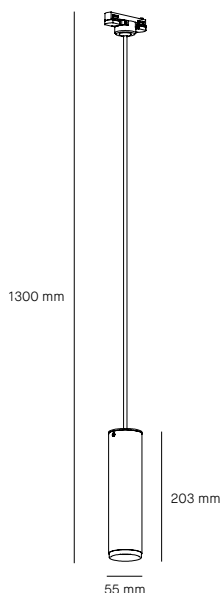


#### HAUL 55 AC ST1P.

Ø55 mm | H. Max.1300 mm  
 1 x DOB LED 7W   
 665 lumens | 2.700K  
 CRI 90 | 3-step MacAdam  
 PF. 0,95 | Dimmable  
 Class I: Basic insulation  
 1-Phase adaptor

#### Finishes

- 6865 ● Matt white lacquering (RAL 9016)
- 6866 ● Matt black lacquering (RAL 9005)

1 x GU10 Bulb retrofit   
 Led 8W Ø50mm  
 Code 2123 | CRI 90  
 700 lumens | 2.700K  
 Dimmable  
 Class I: Basic insulation  
 1-Phase adaptor

#### Finishes


- 6845 ● Matt white lacquering (RAL 9016)
- 6846 ● Matt black lacquering (RAL 9005)

#### HAUL 40 AC ST1P.


Cylinder in extruded aluminium. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005). Inner core, with heat sink function and Led housing, injected in aluminium. Injected polycarbonate reflector with high vacuum aluminium finish.

#### HAUL 55 AC ST1P.

Cylinder in extruded aluminium. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005). Inner core, with heat sink function and Led housing, injected in aluminium. Led " Holder" in polycarbonate injected. Injected polycarbonate reflector, white finishing (MOD. 6865-6866). Polycarbonate injected decorative ring. Assembly by pressure. Finishing in white, black and translucent.

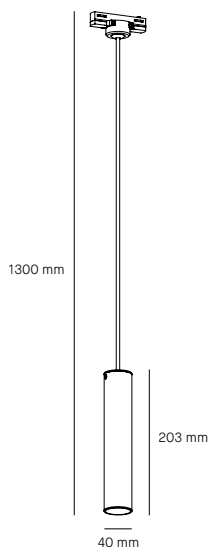

#### HAUL 40 AC ST3P.

Ø40 mm | H. Max.1300 mm  
 1 x DOB LED 5W   
 500 lumens | 2.700K  
 | CRI 90  
 3-step MacAdam  
 PF. 0,95  
 Dimmable  
 Class I: Basic insulation  
 3-Phase adaptor

#### Finishes

- 6811  Matt white lacquering (RAL 9016)
- 6812  Matt black lacquering (RAL 9005)

#### DOWNLOADS

##### Catalogue

[Haul](#)

##### 3D Files

[6811/6812](#)  
[6867/6868](#)  
[6847/6848](#)

##### 3D Max Files

[6811/6812](#)  
[6867/6868](#)  
[6847/6848](#)

##### Assembly instructions


[6811/6812](#)  
[6867/6868](#)  
[6847/6848](#)

##### Photometric curve


[6811/6812](#)  
[6867/6868](#)  
[6847/6848](#)

##### Economic efficiency index


[6811/6812](#)  
[6867/6868](#)  
[6847/6848](#)

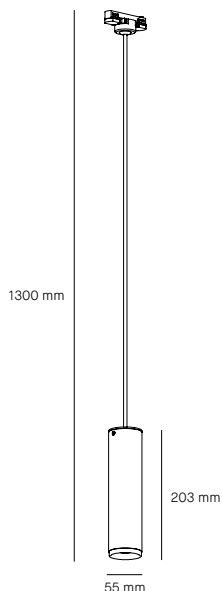


#### HAUL 55 AC ST3P.



Ø55 mm | H. Max.1300 mm  
 1 x DOB LED 7W   
 665 lumens | 2.700K  
 CRI 90 | 3-step MacAdam  
 PF. 0,95 | Dimmable  
 Class I: Basic insulation  
 3-Phase adaptor

#### Finishes

- 6867  Matt white lacquering (RAL 9016)
- 6868  Matt black lacquering (RAL 9005)

1 x GU10 Bulb retrofit   
 Led 8W Ø50mm  
 Code 2123 | CRI 90  
 700 lumens | 2.700K  
 Dimmable  
 Class I: Basic insulation  
 3-Phase adaptor

#### Finishes

- 6846  Matt white lacquering (RAL 9016)
- 6847  Matt black lacquering (RAL 9005)

#### HAUL 40 AC ST3P.

Cylinder in extruded aluminium. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005). Inner core, with heat sink function and Led housing, injected in aluminium. Injected polycarbonate reflector with high vacuum aluminium finish.

#### HAUL 55 AC ST3P.

Cylinder in extruded aluminium. Finishing in matt white lacquer (RAL 9016) and matt black lacquer (RAL 9005). Inner core, with heat sink function and Led housing, injected in aluminium. Led " Holder" in polycarbonate injected. Injected polycarbonate reflector, white finishing (MOD. 6867-6868). Polycarbonate injected decorative ring. Assembly by pressure. Finishing in white, black and translucent.