



Lahti100

The Lahti100 configuration changes the impact this pendant has on a space, while staying true to the original aesthetic of simplicity and elegance. Bespoke options available.
Profile size: 100x50mm. Up to 8 rings from 80 to 220cm diameters. Larger sizes available. Integral LED lighting.

- Hanging** - Fully adjustable drop height on 1.2mm stainless steel suspension cables.
- Light Source** - External or internal multifaceted clear diffusers. LED matrix, CRI>95, ~ 50K hours life. LED standard colour temperature options: 2.7k and 3k (other temperatures available on request). Power to fixtures: Via suspension cables up to 150Watt. Light Output: decorative lighting element only. Indicative Lumen level available on request.
- LED Driver** - Triac Dimmable (5%-100%) as standard, all dimming protocols available on request. Wattage dependent on sizing. Output Voltage: 24V. Input Voltage: 110V-230V-277V, to be specified.


Bespoke options and design service available. All fittings and installation instructions are provided.

Maintenance
 Clean with smooth and dry cloth. Do not use any ammonia, solvents or abrasives. No user serviceable components. Refer to instruction manual for detailed cleaning instructions.

Contact CDH for further technical details/downloads:
technical@camerondesignhouse.com
<https://camerondesignhouse.com>


Lahti100 Single

Standard dimensions:
 80/100/120/150cm
 32"/40"/47"/59"

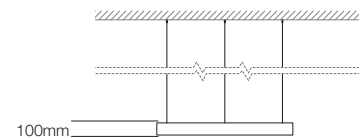

Lahti100 Cluster

Standard dimensions:
 80,100,120
 32",40",47"

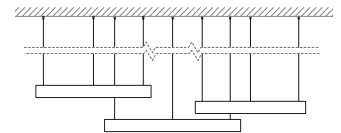

Direct attach as standard. Download our "Standard hanging option" spec for further information. Custom option available.

Finishes and Materials Options

Size limitation for some finishes, please contact CDH for the complete range of finishes and for any further information.

